T3DS01000HD Fact Sheet

Digital Oscilloscope



100 MHz - 200 MHz 12-bit High Resolution



Key Specifications

Bandwidth	100 MHz and 200 MHz Bandwidth models
Channels	4 analog channels + EXT
Memory	100 Mpts/ch (interleaving mode), 50 Mpts/ch (non-interleaving mode)
Sample Rate (Max)	2 GS/s (interleaving mode), 1 GS/s (non-interleaving mode)
Display	10.1" display with 1024x600 resolution
External Wave Gen	Up to 25 MHz

Tools for Improved Debugging

 12-bit ADC – combined with low 	Get better in
noise front end provides	being measu
excellent noise performance.	interference.

- Get better insight on the signal being measured with minimal noise interference.
- Waveform Capture rate up to 120,000 wfm/s, and 500,000 wfm/s
- Capture more time and show more waveform detail.
- Math and Measure 9 basic math functions plus FFT and 50+ automatic measurement parameters.
- Extract results from waveforms and measurements.
- Built-in web server supports remote control over LAN port.
- Save data for external analysis and screen images for reports.
- **History** record function, the maximum recorded waveform length is 80,000 frames.
- Replay the changing waveform history.
- Includes Bode Plot and Power Analysis applications as standard.
- Common applications coverage as standard.
- MSO optional 16 Digital Channel Logic Probe available.
- Add mixed signal debugging to your Oscilloscope.

For more information, please contact:




T3DS01000HD Fact Sheet

TELEDYNE TEST TOOLS Everywhereyoulook™


Digital Oscilloscope


T3DS01000HD Functions & Characteristics




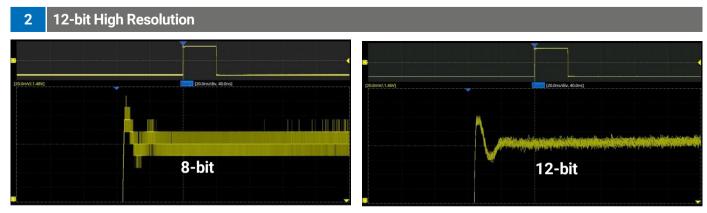

12-bit resolution shows you more details and less noise on the waveform.

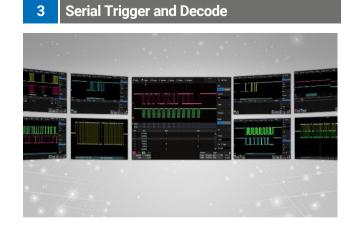

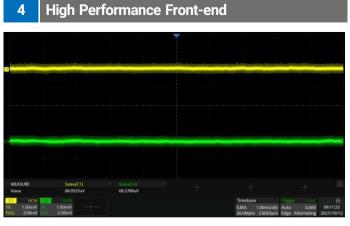



Low noise floor: Only 70 μVrms at 200 MHz bandwidth 0.5 % DC gain accuracy

Excellent User Interface and User Experience

10.1" display with 1024x600 Resolution, Capacitive Touch Screen, Built-in WebServer, Digital Channels (optional), etc.